


3 Zone Thermal Shock Test Chamber




Mobile phone scan
More product information


Energy Conservation

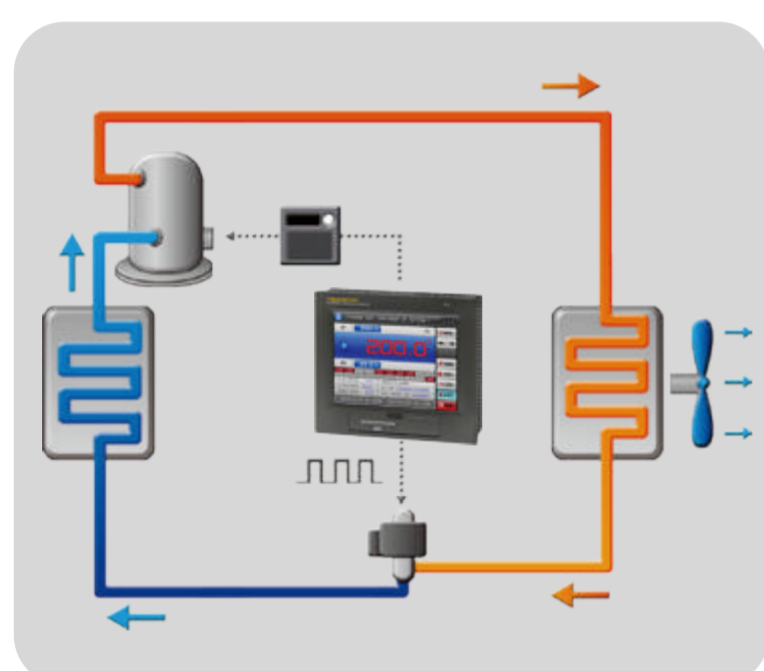

Remote network system

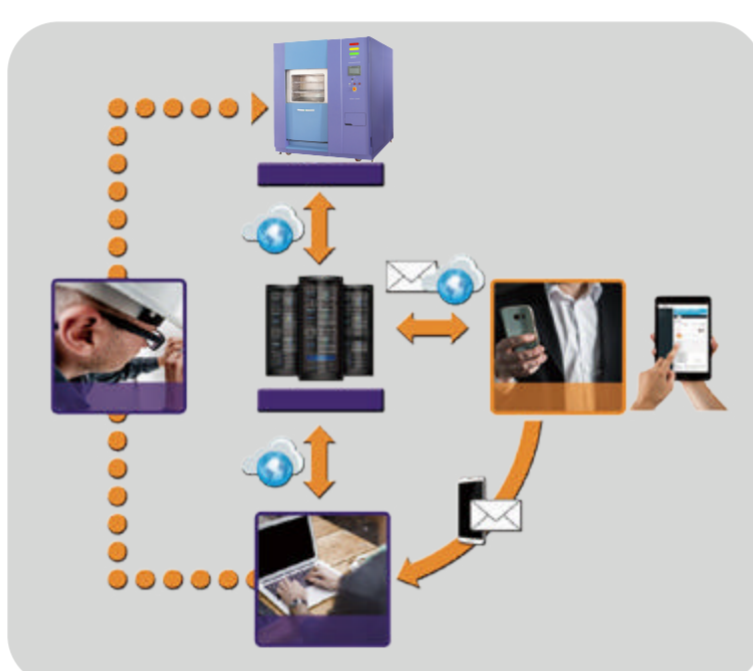

Circuit System

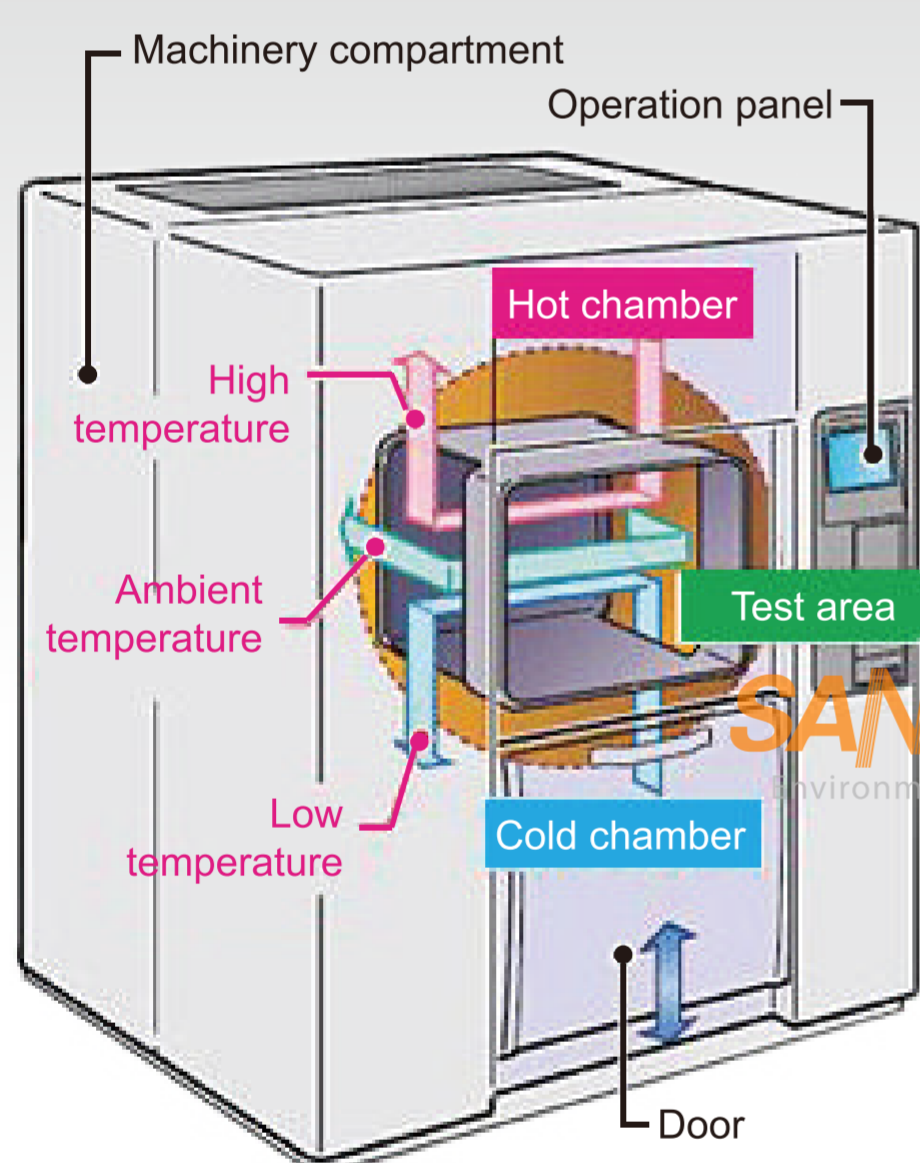

● Specifications

Model	SM-50-3P-A	SM-80-3P-A	SM-100-3P-A	SM-150-3P-A	SM-200-3P-A	SM-300-3P-A	SM-500-3P-A	
Temperature	Temperature impact range	-70℃~150℃ (A:-45℃~150℃;B:-70℃~150℃;)						
	Temperature fluctuation	±1.0℃						
	Low temperature precooling time	25.0℃~-70.0℃ Within 60 mins 1.0~3.0℃/min						
	High temperature preheating time	25.0℃~200.0℃ Within 60 mins 3.0~7.0℃/min						
	Temperature conversion time	3S						
	Temperature recovery time	Within 5 mins				Within 10 mins		
Material / components	Internal material	Stainless steel(SUS304)						
	External material	Cold rolled steel sheet / powder spraying						
	Heat insulating material	100mm thickness polyurethane plate +10mm thickness mineral wool						
	Fan	Centrifugal blower						
	Compressor	France Tecumseh, Germany Bock, Germany Bitzer						
	Condenser	Air cooling, water cooling				water cooling		
	Refrigerant	R404A, R23, R508						
Evaporator	Fin - and - Tube Heat Exchanger							
Heater	Nickel chromium alloy heating wire							
Size	Interior size(mm) W*H*D	350*400*350	400*500*400	500*500*400	500*600*500	650*460*670	960*460*670	960*650*800
	Outer size(mm) W*H*D	1400*1750*1750	1450*1850*1800	1550*1850*1800	1550*2050*2050	1700*2000*2200	2050*2000*2250	2050*2150*2450
	Volume (L)	50L	80L	100L	150L	200L	300L	500L
Operating ambient temperature	+5 ~ 35℃							
Power supply	380V AC 50/60Hz							
Controller	SANWOOD SH5600:Equipped with RS232 port; (7.0 inch controller) USB data export)							

Sanwood (HK) Industrial Corporation.,limited
Guangdong Sanwood Technology Corporation.,limited

ADD: No.88, Songchang Road, Songbotang , Changping, Dongguan, Guangdong
TEL: +86+769-81182799
FAX: +86+769-82987199
E-mail: info@sanwood.cc
www.sanwood.cc
www.climatic-chambers.com



Mobile phone scan
can visit our official website